GP-2620

ALLOWABLE VARIATION ON EIMENSIONS CONTROLLING FINISHED SURFACES IS \$\(\frac{1}{2}\)-010 UNLESS OTHER WISE SPECIFIED. ALL DIMENSIONS IN INCHES.

| DRWG. START | ED -, | 12-24-40 | | |
|-------------|-------|----------|-----|--|
| DRWG. COMPI | ETED | 12-24-40 | | |
| ENG. INF | SUPP. | REVISED | CK. | |
| K-10 | #21 | 12-31-40 | THU | |
| L10# | 2 | 10-21-41 | T. | |
| | | 200 | | |
| | | 1" | 1 | |
| | | ı | | |

O


BEL

GER -

DEN

MEX DRA

AUST

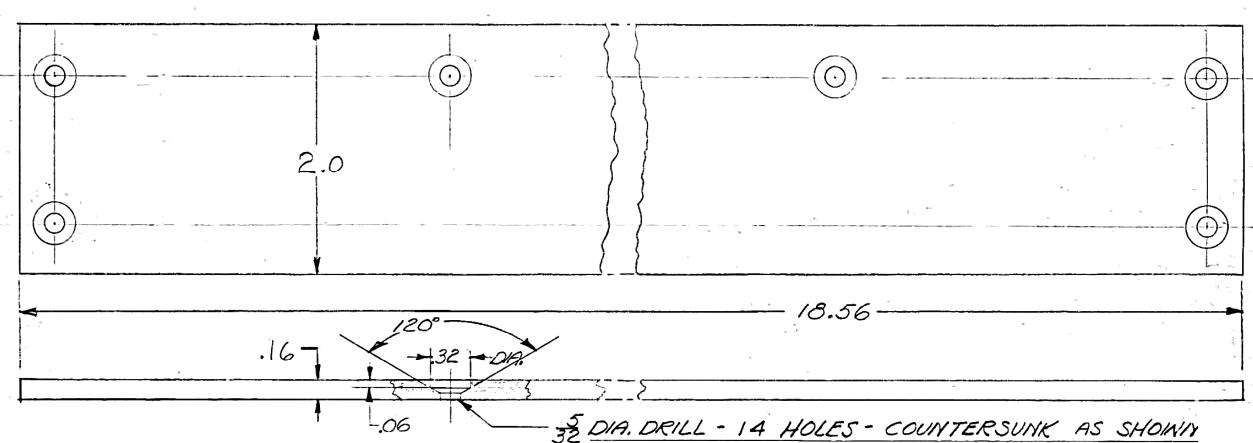

32 DIA. DRILL - 14 HOLES - COUNTERSUNK AS SHOWIN HOLES TO BE LOCATED TO MATCH HOLES IN BRAKE BAND GP 2611

MADE FROM M-5978ABRAKE BAND LINING

Credit

From the Collections of The Henry Ford.

Gift of Ford Motor Company.

| DESIGN | SCALE | DRAWN BY | CK. | 0.K. | FORD MOTOR CO |
|--------|-------|----------|-----|------|----------------|
| | FULL | Hur | | | DEARBORN, MICH |

GP-2620