


Credit

From the Collections of The Henry Ford.
Gift of Ford Motor Company.

DRWG. STARTED	1-3-41		
DRWG. COMPLETED	1-3-41		
ENG. INF.	SUPP.	REVISED	CK.
K10	31	1-10-41	W

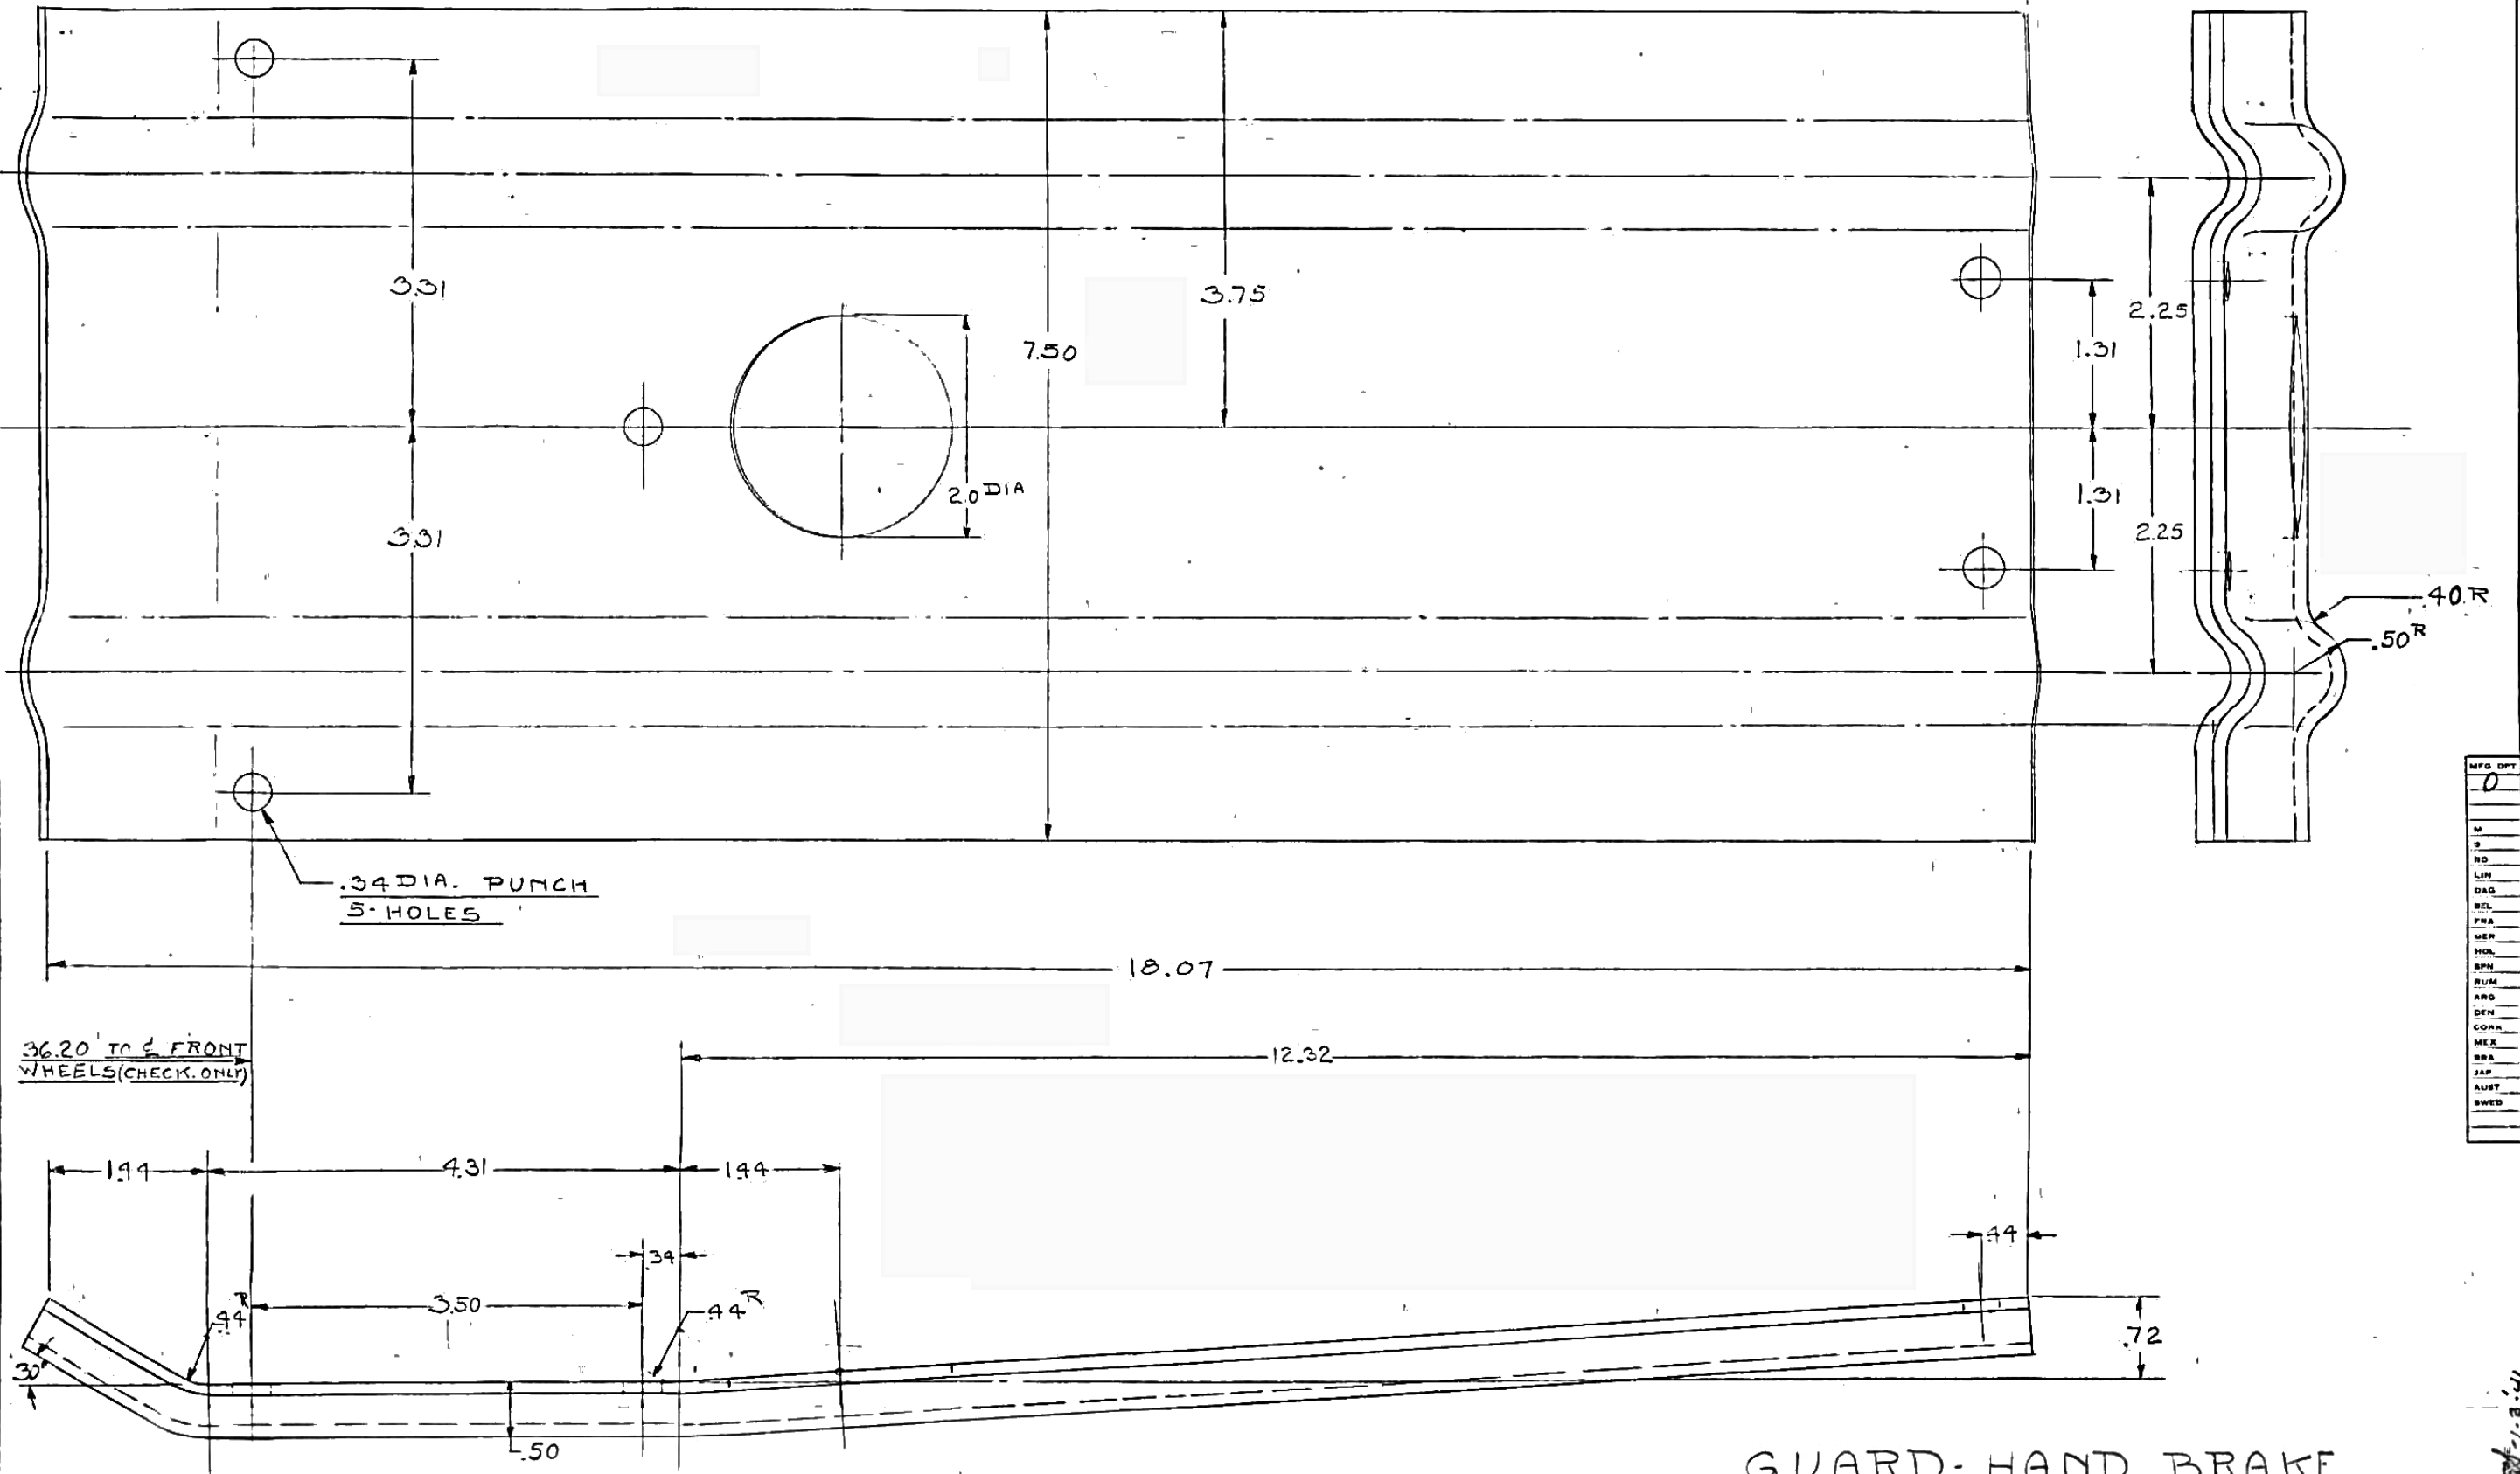

MFG. DPT.	0
M	
U	
RD	
LIN	
DAG	
BEL	
FRA	
GER	
HOL	
SPN	
RUM	
ARG	
DEH	
CORR	
MEZ	
BRA	
JAP	
AUST	
SWED	

36.20 TO FRONT WHEELS (CHECK ONLY)

.34 DIA. PUNCH
5 HOLES

PAINT-SEE SPEC

GUARD-HAND BRAKE

H.R. O.H. STEEL-TYPE "L" OR .18-.25 CARBON P#0 #13 U.S.S. GAGE (.090-.100)
ELASTIC LIMIT 38000 LBS. PER SQ. IN. MIN. ELONGATION IN THE TRANSVERSE
DIRECTION NECESSARY TO FORM PART-BRINELL HARDNESS 121 MIN.

GP-2750

ALLOWABLE VARIATION ON DIMENSIONS CONTROLLING FINISHED SURFACES
IS ±.010 UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS IN INCHES.

DESIGN	SCALE	DRAWN BY	CK.	O.K.	FORD MOTOR CO.	GP-2750
	FULL	H. H. H.			RESEARCH, MICH.	

MATERIAL AND DPT. 1-3-41