





DRWG. STARTED	12-31-40		
DRWG. COMPLETED	12-31-40		
ENG. INF.	SUPP.	REVISED	CK.
K10	#36	1-20-41	
K10	#150	3-21-41	RJ
L10	208	3-3-42	
L10	1015	8-27-42	F.P.

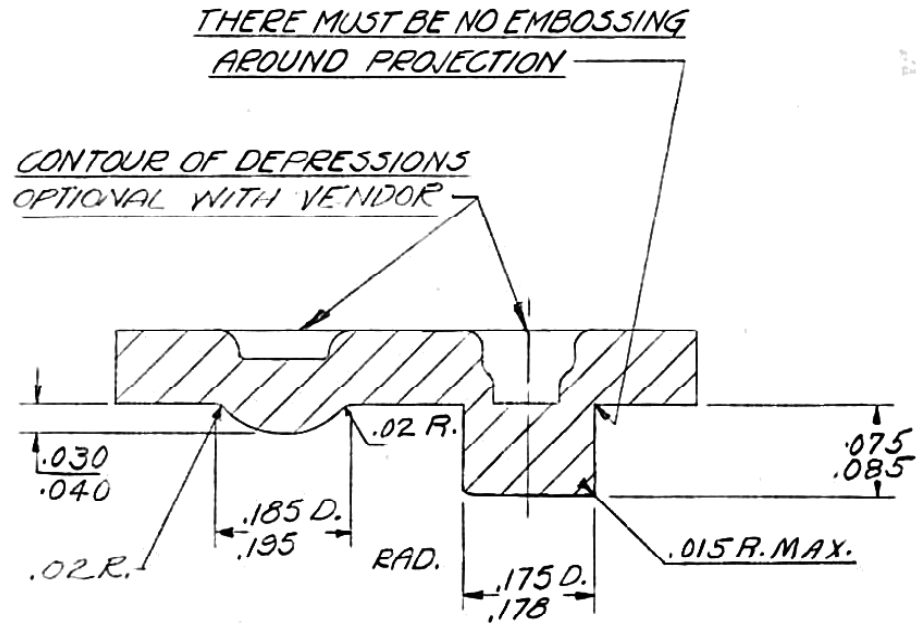


SECTION AA
4-TIMES SIZE



ACTUAL SIZE

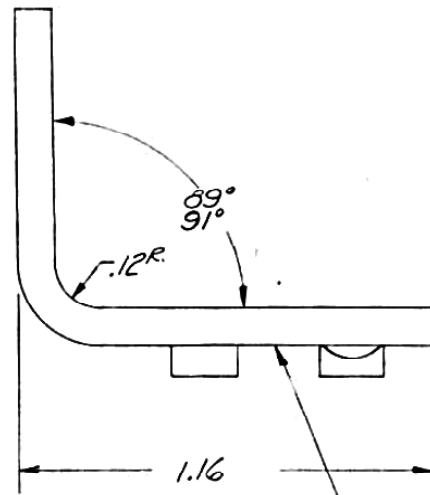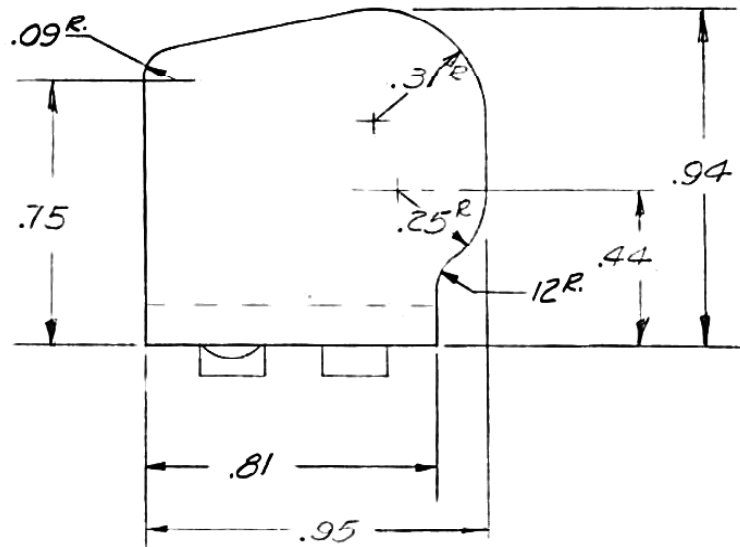

THIS SURFACE MUST BE FLAT WITHIN $.010$

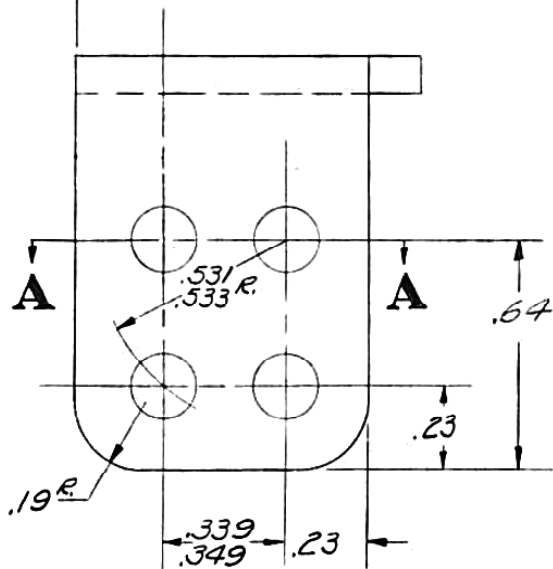

MFG DPT	
M	
B	
DD	
LI-N	
EAC	
REL	
FRA	
GER	
HOL	
STN	
HUM	
ARG	
LEN	
CONR	
MEK	
BRA	
JAP	
AUST	
VED	

SPACER-BRAKE SHOE
H.R., L.C., O.H. STEEL P#0.
#12 U.S.S. GAGE (.1023-.1163)

GP2033

-L.H. SHOWN

GP2032

-R.H. SYM. OPP

ALLOWABLE VARIATION ON DIMENSIONS CONTROLLING FINISHED SURFACES IS $\pm .010$ UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS IN INCHES.

41552-R
41551-L

DESIGN	SCALE	DRAWN BY	CK.	O.K.	FORD MOTOR CO.
BENDIX	DOUBLE	HALOSMY			DEARBORN, MICH.

GP2032