

GP-2257	A	4.24
GP-2083 *	A	8.75


ALLOWABLE VARIATION ON DIMENSIONS CONTROLLING FINISHED SURFACES
IS $\pm .010$ UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS IN INCHES.

REAR

FRONT

DRWG. STARTED		2-19-41	
DRWG. COMPLETED		2-19-41	
ENG. INF.	SUPP.	REVISED	CK.
K10	#111	2-26-41	
K10	#138	3-13-41	P.L.
K10	#198	6-17-41	
L14	238	3-18-42	
L14	362	6-3-42	JA

* "R"

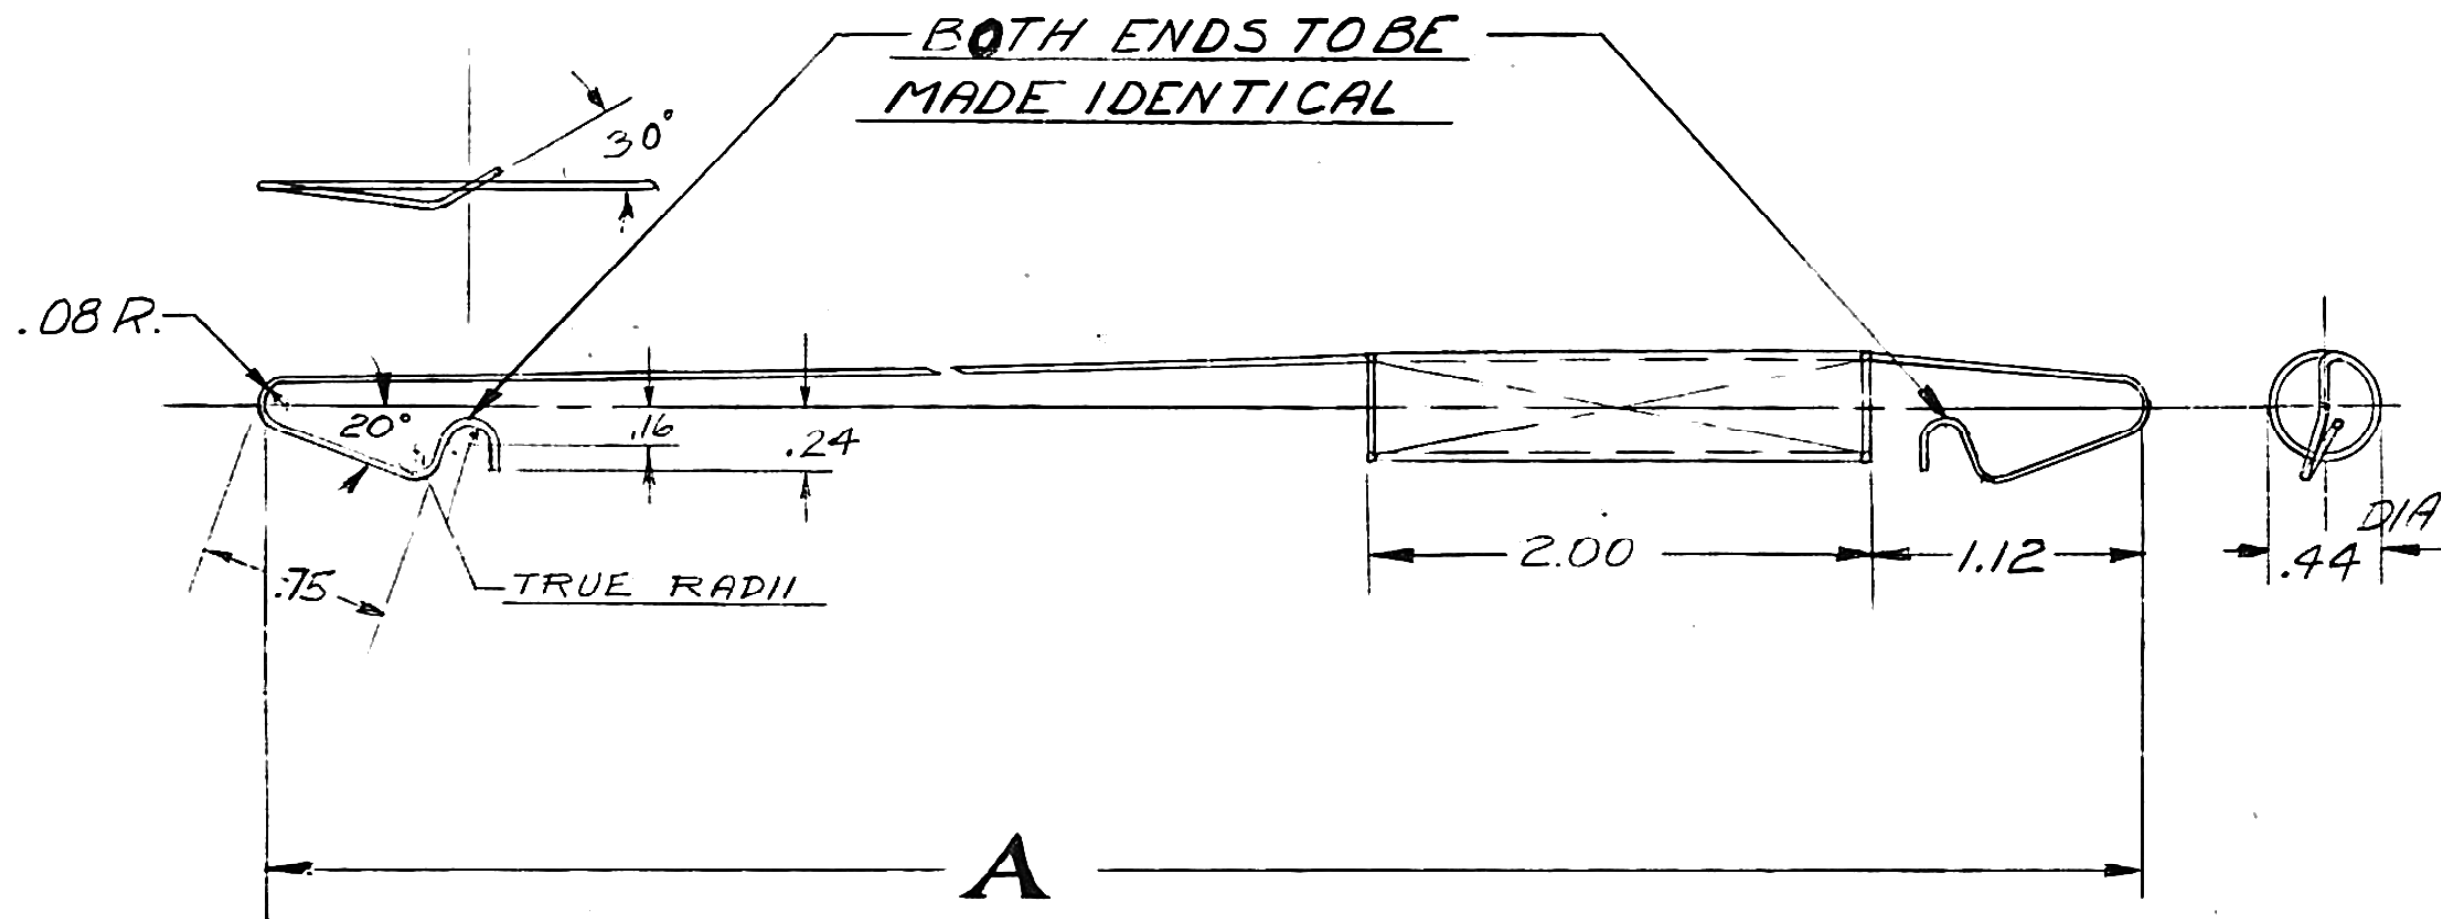

57-58 COILS WOUND TIGHT.
HEAT TO 650° AFTER FORMING
TO BE PAINTED. SEE SPECIF.

SPRING-BRAKE HOSE RETRACTING
H.D. TYPE "S" STEEL SPRING WIRE
#20 W.&M. GA. (.035) MUST BEND
AROUND ITS OWN DIA. WITHOUT FRACTURE

DESIGN	SCALE	DRAWN BY	CK.	O.K.	FORD MOTOR CO. DEARBORN, MICH.	GP-2257
	FULL	SHOMBERGER				

MFG. DPT	0
M	
B	
BD	
LIN	
DAG	
SEL	
FRA	
GER	
HOL	
SPN	
RUM	
ARG	
DEN	
COR	
NEX	
BRA	
JAP	
AUST	
SWED	

MATERIAL AND NAME